450 V

DUAL INVERTER

- Perfect match for small and medium size mobile machines
- Enables traction and auxiliary drives
- High protection class
- 2x AC units up to 30 kVA in one box
- Suits to all types of motors

REFUdrive

RPCS 730-2x15K / -2x30K

For all applications: charge, drive, generate, and convert

www.refu-drive.com

TECHNICAL DATA	RPCS730-2x15K	RPCS730-2x30K
POWER DATA		
AC output power @ 312 V DC	2 × 15 kVA	2 × 30 kVA
Nominal DC voltage	400 V	
DC input voltage range	100 – 600 V	
max. AC output voltage @ 3 AC	300 V	
Rated current @ 4 kHz	2 x 40 A	2 × 80 A
Peak current for 60 s @ 4 kHz	2 x 48 A	2 × 120 A
Peak current for 1 s @ 4 kHz	2 x 60 A	2 x 160 A
Output frequency	0 – 599 Hz (optional up to 1,200 Hz)	
Control supply voltage	24 VDC (± 20 %) optional 12 V DC (± 20 %)	
Ambient temperature	-25 to 85 °C (beyond 45 °C with derating)	
Coolant temperature	-25 to 55 °C	
CONTROL HARDWARE		
Analog I/O	2x IN (± 10 V or ± 20 mA) and 2x OUT (± 5V, max. 5 mA)	
Digital I/O	4x IN / 4x OUT / 4x IN/OUT	
Service interface	RS485	
Communication interface	CANopen / SAE J1939	
Motor temperature control	PTC, PT1000, KTY	
Encoder system	Resolver, HTL, TTL, sine/cosine encoder	
Resolver input voltage	7 V_{rms}	
Transformation ratio for resolver	0.286 or 0.5	
MECHANICAL DATA		
Dimensions w/o connectors [L × W × H]	354 × 300 × 105 mm	363 × 310 × 110 mm
Weight	7.5 kg	11.5 kg
Degree of protection	IP 67 (IP6K9K as option)	
Type of cooling	Liquid: water-glycol	
GENERAL DATA		
User Interface	REFUdriver software tool	
Electromagnetic compatibility	UN ECE R10, EN 61800-3	
Protective functions	Short circuit, earth fault, over current, voltage and temperature monitoring, motor temperature monitoring	
Configurations	Motor inverter, generator inverter, DC-DC converter, charging devices, on-board power supply	
Cable connection	HV: gland / LV control: plug	

Safety functions and E1 marking are available as an option

POWERFUL DRIVE SOLUTIONS FOR E-MOBILITY

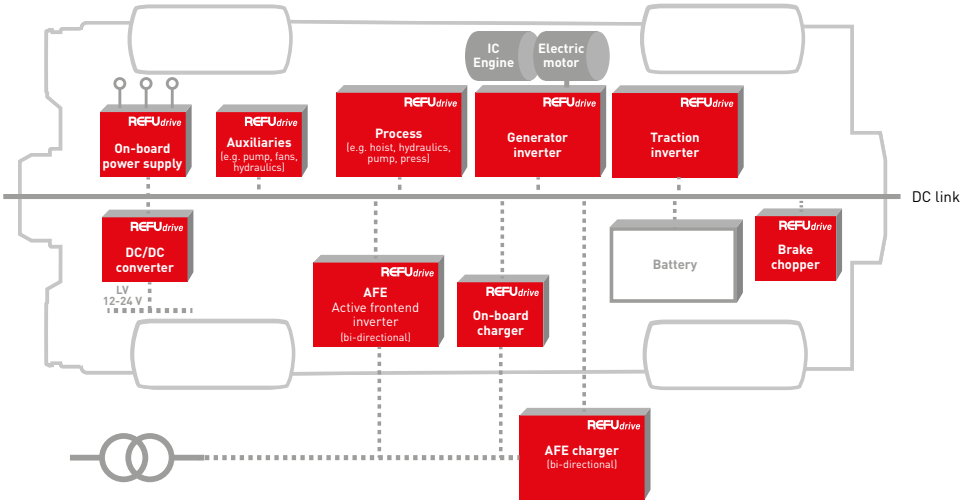

+ APPLICATIONS

- Municipal vehicles
- Construction equipment
- Commercial vehicles
- Public transportation
- Agricultural machines

REFU Drive GmbH
Marktstraße 185 | D-72793 Pfullingen | Phone +49 7121 4332-100 | info@refu-drive.com | www.refu-drive.com

20221118_REFUdrive_RPCS-730-2x15K-2x30K_450V_datasheet_EN_V02 | No responsibility is taken for the correctness of this information. Subject to modification.