



TRACTION INVERTER

- + Highest degree of protection and reliability
- + Flexible and individual configurations
- + Proofed for harshed conditions
- + Highest performance at maximum ambient and coolant temperature
- + Suits to all types of motors

REFU*drive*

RPCS 730-80K / -160K

The powerful high voltage inverter for all drive applications

TECHNICAL DATA

RPCS730-80K

RPCS730-160K



POWER DATA

| | | |
|-------------------------------|---|--|
| AC output power @ 570 V DC | 80 kVA | 160 kVA |
| Nominal DC voltage | 400 V | |
| DC input voltage range | 100 – 600 V | |
| max. AC output voltage @ 3 AC | 300 V | |
| Rated current @ 4 kHz | 215 A | 460 A |
| Peak current for 60 s @ 4 kHz | 451 A | 598 A |
| Peak current for 1 s @ 4 kHz | - | 690 A |
| Output frequency | 0 – 599 Hz (optional up to 1,200 Hz) | |
| Control supply voltage | 24 V DC ($\pm 20\%$) optional 12 ($\pm 20\%$) | |
| Ambient temperature | -25 to 85 °C (beyond 45 °C with derating) | -25 to 85 °C (beyond 65 °C with derating) |
| Coolant temperature | -25 to 55 °C | -25 to 65 °C |

CONTROL HARDWARE

| | |
|-----------------------------------|---|
| Analog I/O | 1x IN (± 10 V or ± 20 mA) and 1x OUT (± 5 V, max. 5 mA) |
| Digital I/O | 4x IN / 2x OUT / 4x IN/OUT |
| Service interface | RS485 |
| Communication interface | CANopen / SAE J1939 |
| Motor temperature control | PTC, PT1000, KTY |
| Encoder system | Resolver, HTL, TTL, sine/cosine encoder |
| Resolver input voltage | 7 V _{rms} |
| Transformation ratio for resolver | 0.286 or 0.5 |

MECHANICAL DATA


| | | |
|---------------------------------------|--------------------------|--------------------|
| Dimensions w/o connectors [L × W × H] | 425 × 320 × 143 mm | 506 × 552 × 150 mm |
| Weight | 22 kg | 45 kg |
| Degree of protection | IP 67 (IP6K9K as option) | |
| Type of cooling | Liquid: water-glycol | |

GENERAL DATA

| | |
|-------------------------------|--|
| User Interface | REFUdriver software tool |
| Electromagnetic compatibility | UN ECE R10, EN 61800-3 |
| Protective functions | Short circuit, earth fault, over current, voltage and temperature monitoring, motor temperature monitoring |
| Configurations | Motor inverter, generator inverter, DC-DC converter, charging devices, on-board power supply |
| Cable connection | HV: gland or plug / LV control: plug |

Safety functions and E1 marking are available as an option

POWERFUL DRIVE SOLUTIONS FOR E-MOBILITY

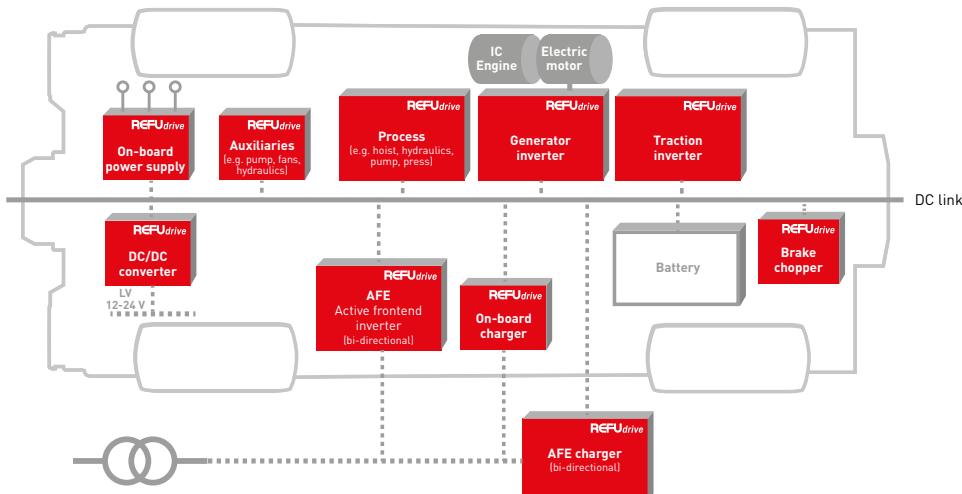

APPLICATIONS

- Construction equipment
- Commercial vehicles
- Public transportation
- Municipal vehicles
- Agricultural machines
- Port equipment